


STA-FLEX® LEF™710S DIRECTIONAL BEAM LINEAR FIBER

Project:

Type:

Catalog Number: **LEF710S**


System Component: **Optical Fiber**

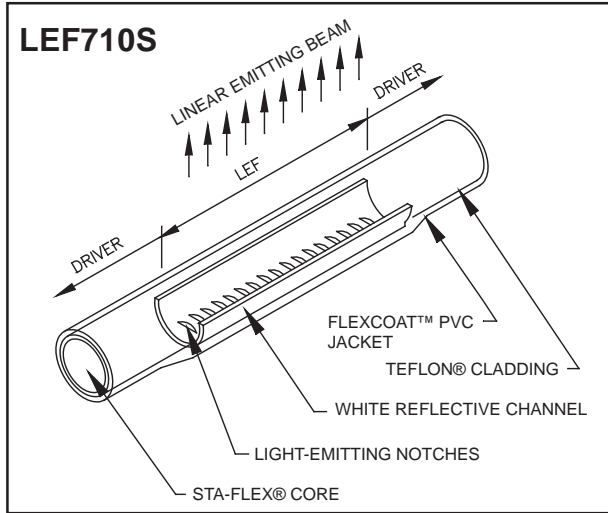

- ◆ Coves and Soffits
- ◆ Decorative Accents
- ◆ Back Lighting
- ◆ Alternative to Neon and LED Strip Lighting
- ◆ Direct and Indirect Lighting Applications
- ◆ Industrial Task Lighting
- ◆ Hazardous Location Illumination
- ◆ Under Cabinet Lighting
- ◆ Vehicle Exterior Accents

SPECIFICATIONS:

Series Number	LEF710S
Core Diameter	.74" (18.8mm)
Outer Diameter	1.0" (25.4mm)
Operating Temperature Range	Up to 194° F (90° C)
Weight of Optical Fiber (Average per Foot)	6.78oz. (192.2g.)
Minimum Bend Radius	12" (304.8mm) or larger
LEF710S-WR Outer Diameter	1.068" (27.13mm)
Compatible LED Sources	LI-250000 Color Changing 2-Port LED Illuminator LI-350000 Color Changing 3-Port LED Illuminator FM1 - Single 3 Watt LED Light Engine FM3 - Three 3 Watt LED Light Engine



The LEF710S optical fiber was specifically developed for use with High-Brightness LED (HB LED) light sources. The fiber is manufactured with Lumenyte's patented technology that directs light in an evenly focused beam along the entire length of the fiber optic.

NOTE: Images are not to scale



STA-FLEX® LEF™710S DIRECTIONAL BEAM LINEAR FIBER

Ordering Information

LED SERIES	UNDERWATER	Total Footage (Length in ft.)	DRIVER (Length in ft.) Single and Double ended fibers.	LEF (Length in ft.)	DRIVER (Length in ft.) Double ended fibers only.
LEF710S	-WR	_____ FT	_____ FT	_____ FT	_____ FT

EXAMPLE - When Lit From Both Ends: LEF710S-38'(1'DR+36' LEF+1'DR)

SERIES	DRIVER
TOTAL FOOTAGE	LEF
	DRIVER

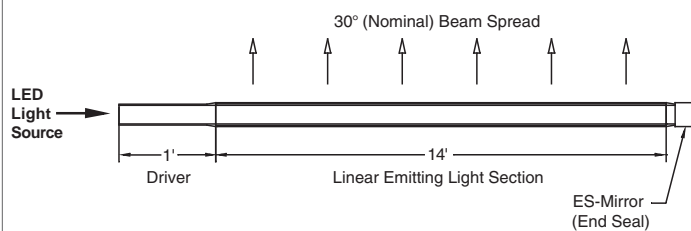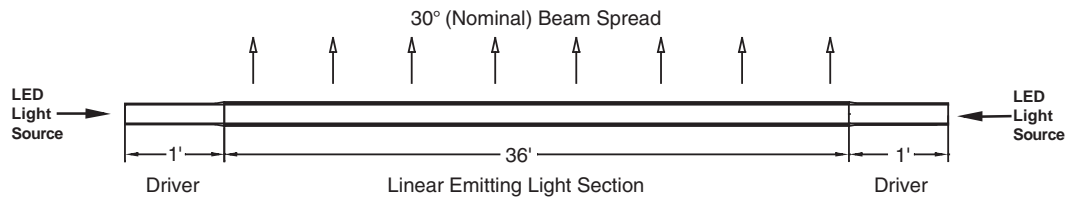

EXAMPLE - When Lit From One End: LEF710S-15'(1'DR+14' LEF)

SERIES	LEF
TOTAL FOOTAGE	DRIVER

Recommended Distances for Effective LEF710S Brightness

- The effective light output of LEF710S fiber optic is subjective and based upon several variables such as:
 - Intensity of LED light source
 - Background color contrast
 - Attenuation of light
 - Number and wattage of LEDs in the light source
 - Viewing angle
 - Ambient light level
 - Color of light
 - Length of fiber optic run
- Runs up to 20' (6.1m) when lit with a single light source or 40' (9.14m) when lit with a light source at each end, are the recommended maximums when using the higher intensity LED light sources.

Driver

- The LEF710S LED Series of optical fibers is "driver dependent" and is supplied with a minimum 1' (30.5cm) length of driver. The driver can be field cut as required. Driver lengths up to a recommended maximum of 3' (91.4cm) have minimum impact on photometric performance on a **straight** run. LIC recommends a 9" (228.6mm) or greater bend radius in the driver. A second driver is required when fiber is lit from both ends.

Mounting

- Use 25mm track for mounting in straight-line applications.
- Tracking may be field cut into short segments and "clips" for mounting in curved applications.

Environment

- Optical fiber core must be protected in wet or sunlit areas. Use end seals where applicable.
- Protect core and cladding from dirt and abrasions.
- Install fiber at temperatures of 10° C (50° F) or higher.
- Prior to installation, remove the optical fiber from the box in accordance with Lumenyte's printed unpacking instruction sheet and lay fiber straight for several hours to remove coil memory.
- For underwater use, add -WR jacket.