



# MOUNTING CLIPS

Project:

Type:

Catalog Number: **OPCL, NSC**

System Component: **Mounting Clips**

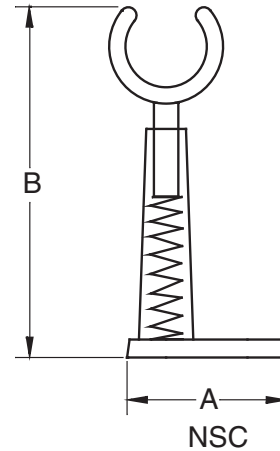

## DESCRIPTION:

**OPCL (Optic Clip):** For interior use, Lumenyte OPTIC CLIPS are clear, flexible polymer clips for flush mounting optical fibers and cables. The OPCL attaches with a screw (not included). Clips are .500" (12.7mm) wide.

**NSC (Stand-Off Clip):** For interior or exterior use, STAND-OFF CLIPS are rigid, spring-loaded clear polymer clips for mounting SWN, SFC and LSL optical fibers. The swivel head securely holds the optical fiber in an elevated position from the mounting surface. NSC installs easily with a stainless steel screw (not included). For straight runs, continuous lengths of LST track (or WUC/CUC track) are recommended.

## Ordering Information (ALL DIMENSIONS ARE NOMINAL)

### OPCL:

Model	Use With	A	B
OPCL-2	SWN200	.812" / 20.62mm	.250" / 6.35mm
OPCL-3	SWN300 / SFC201 / LSL-49 / SFC201-WR	.812" / 20.62mm	.375" / 9.53mm
OPCL-4	SWN400 / SFC301 / SFC301-WR / LSL-84 / LEF310M / LEF310M-WR	1.000" / 25.40mm	.500" / 12.70mm
OPCL-5	SWN500 / SFC401 / SFC401-WR / LEF410M / LSL-144	1.125" / 28.58mm	.625" / 15.87mm
OPCL-6	SFC501 / LEF410M-WR	1.375" / 34.92mm	.800" / 20.32mm
OPCL-6.5	LEF510M / SFR510 / SFC501-WR	1.50" / 38.10mm	.860" / 21.84mm

### NSC:

Model	Use With	A	B
NSC-3	SWN400 / SFC301 / LSL-84	.3" / 7.62mm	2.10" / 53.34mm
NSC-4	SWN500 / SFC401 / LSL-144	.3" / 7.62mm	2.20" / 55.90mm
NSC-5	SFC501	.3" / 7.62mm	2.25" / 57.20mm

### Note

**TO MINIMIZE SCALLOPING, INSTALL CLIPS ON 12" CENTER (30cm)**

**LUMENYTE** INTERNATIONAL CORPORATION

74 Icon, Foothill Ranch, CA 92610 USA

EMAIL: [licinfo@lumenyte.com](mailto:licinfo@lumenyte.com) WEBSITE: [www.lumenyte.com](http://www.lumenyte.com) TEL: 949.829.5200 FAX: 949.829.5201

All LUMENYTE® Fiber Optics are Protected by either U.S. PATENTS or INTERNATIONAL or Specific Country PATENTS, or both. Copyright© 4 December, 2008. All Rights Reserved by LUMENYTE INTERNATIONAL CORPORATION.